


LOOKBOOK *Corporate*



LOOKBOOK Corporate

- a** **Transparent LED Film - LAT300MT1**
- 30 mm (Silicone OCA) Pixel Pitch
 - Brightness 1,000 cd/m²
 - ≥00,000:1 Contrast Ratio
 - Viewing Angle 120 x 120
 - Dimensions 17.9" {w} x 11.8" {h} x 3.0" {d}
 - Scalable and Flexible
 - Self-Adhesive
 - 256 Pixels per LED Film
- b** **Direct View Indoor LED - LAP Series**
- High brightness 1,000 | 1,200 nit
 - 6000:1 Super contrast ratio
 - Visual Viewing Angle {Horizontal} 160° {Vertical} 140°
 - LG Dynamic Contrast Algorithm
 - SuperSign Lite | SuperSign C | SuperSign
 - Simple Editor
 - webOS
 - Refresh Rate: 1920 Hz
- c** **WQHD+ IPS Curved Ultrawide Monitor - 38CB99-W**
- 37.5" 21:9 Curved UltraWide™
 - 3840x1600
 - AMD FreeSync™ Technology
 - 1 ms Motion Blur Reduction
 - USB Type C
 - USB 3.0 Quick Charge
 - Bluetooth Speakers
 - sRGB over 99%, Color Calibrated
 - Black Stabilizer, Dynamic Action Sync
 - OnScreen Control / My Display Presets / Screen Split 2.0 (PIP Mode)
 - Tilt / Height Adjustable Stand

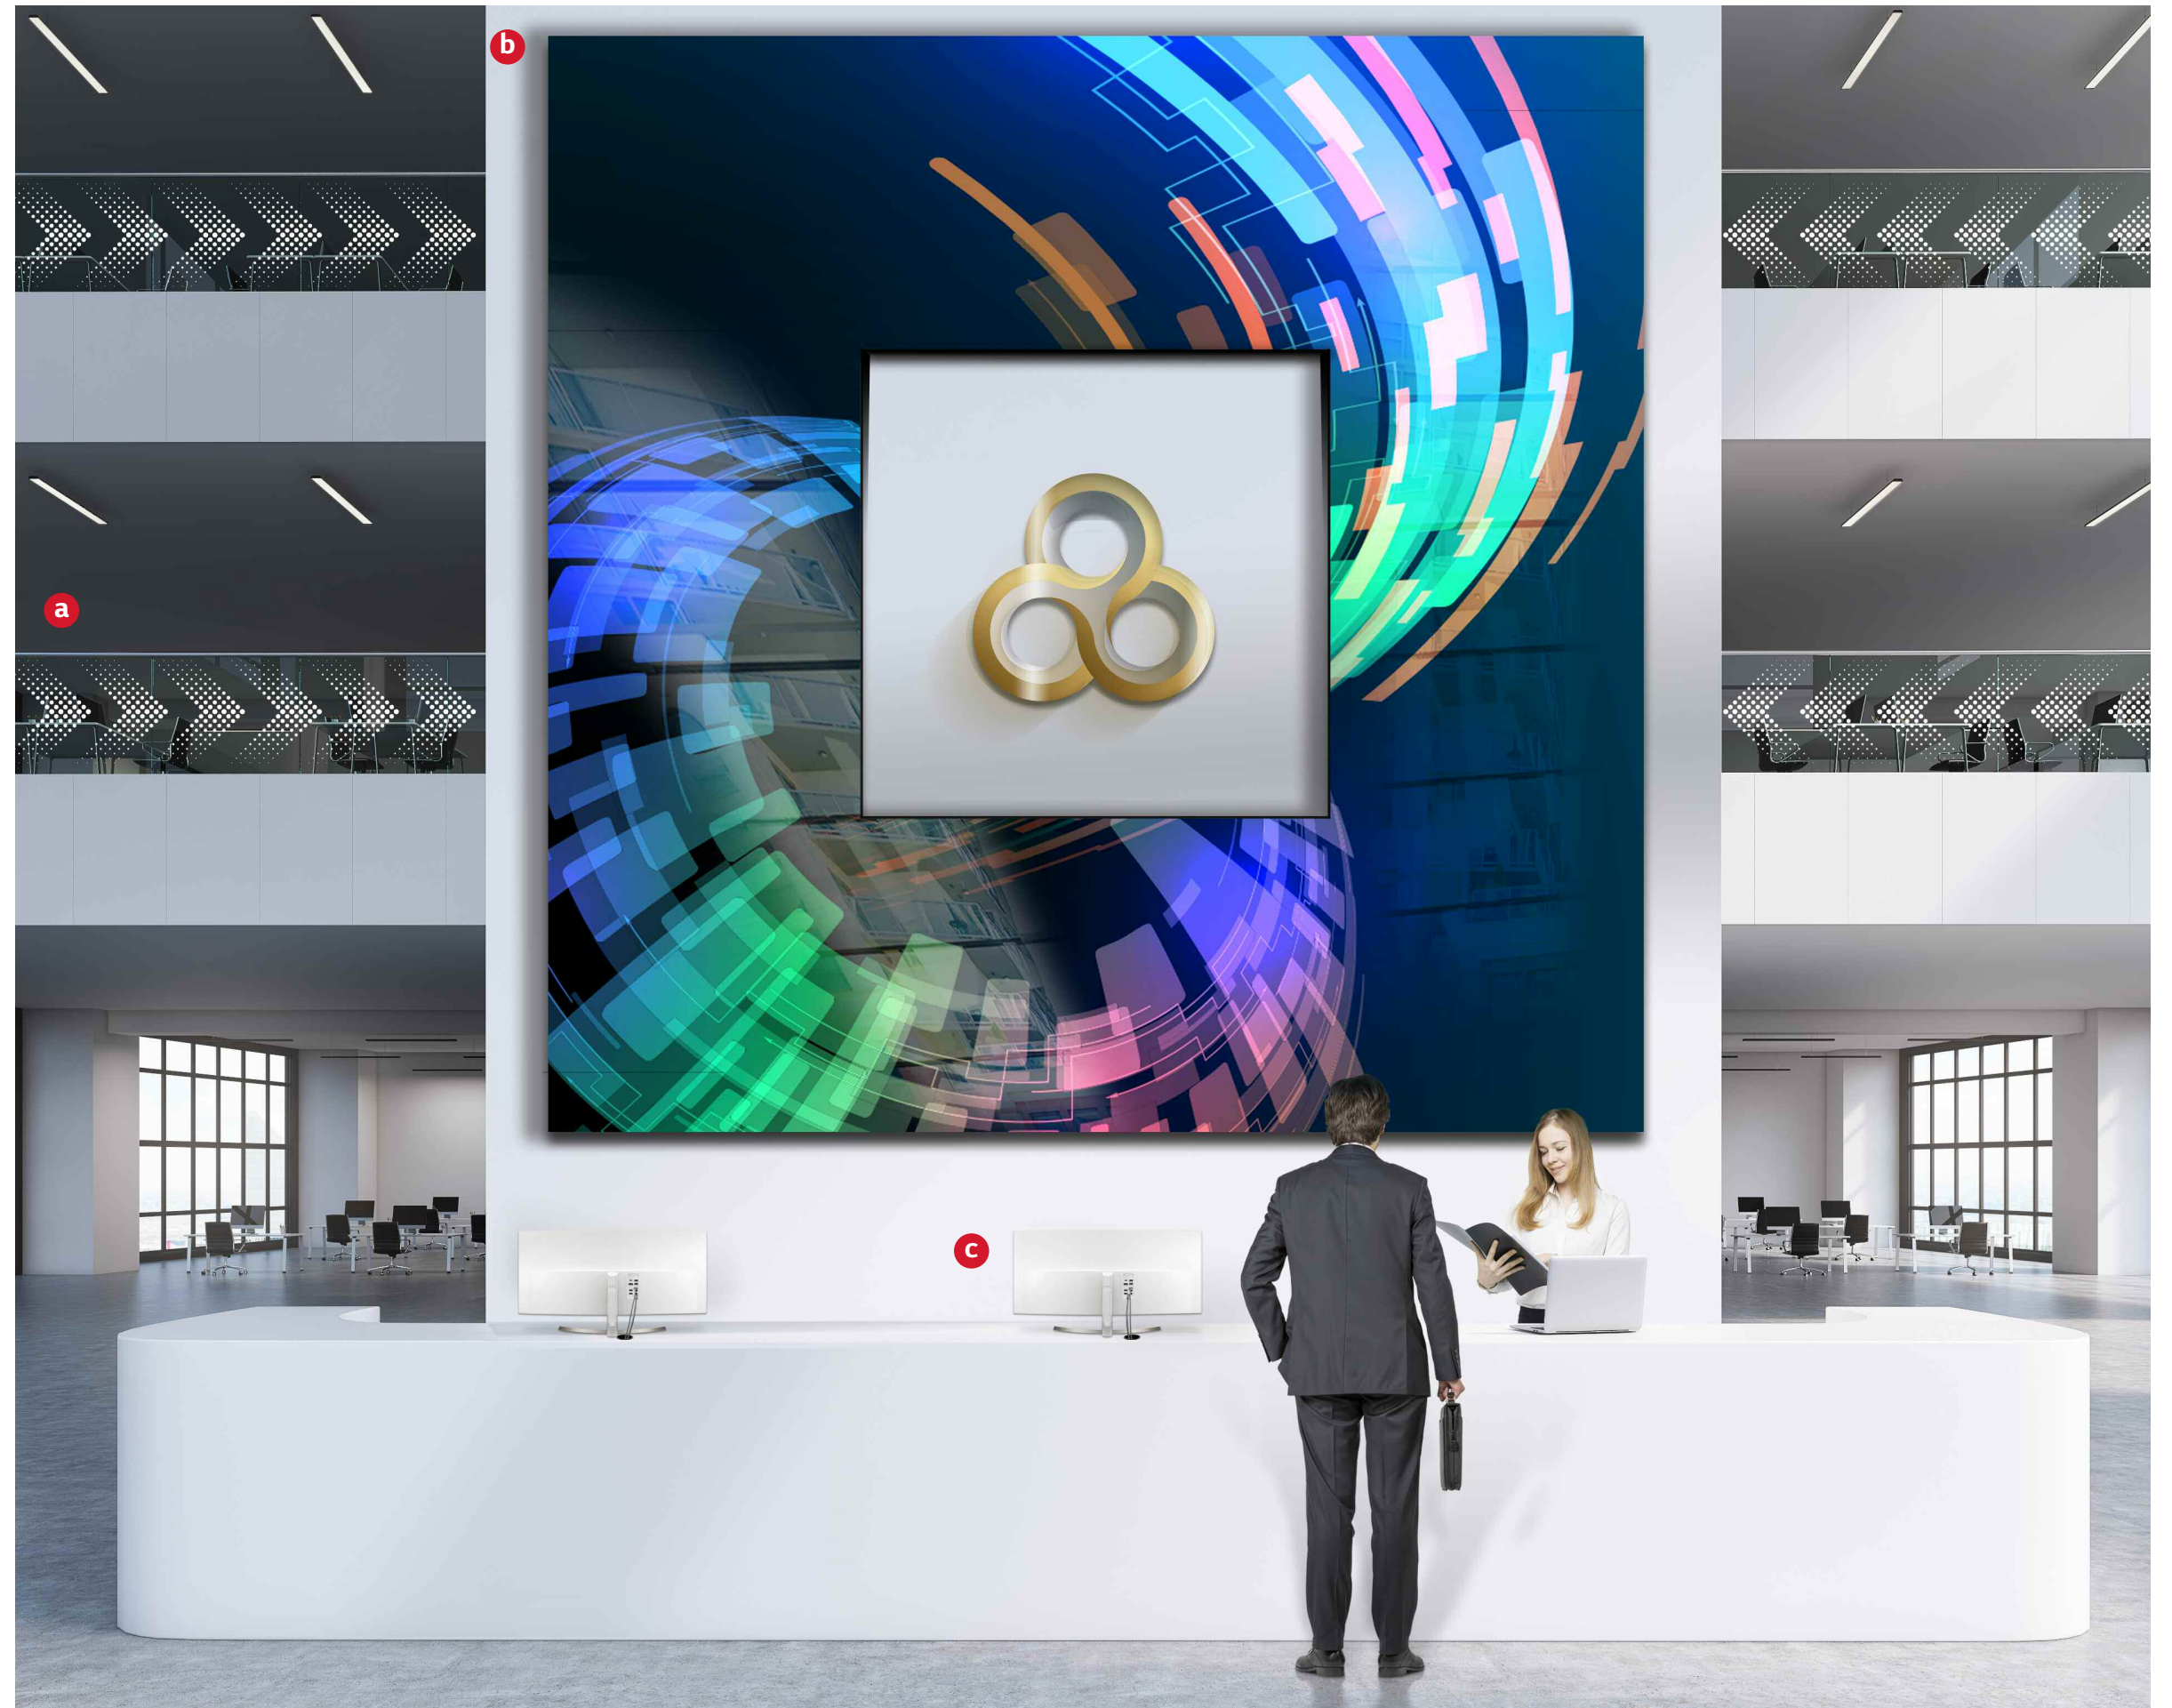

LOOKBOOK Corporate

- a Wallpaper OLED Display - 55EJ5D**
 - 55" class
 - 1920 x 1080 FHD
 - Brightness 100/400cd/m² {APL100% | 25%} average picture level
 - Bezel Width: 1.2mm {T, B, L, R offset bezel}
 - Available in two types of installation
 - Ceiling Mount
 - Wall Mount
 - Hard Coating {2H}, anti-reflective treatment of the front polarizer {1.0% reflective typ}
 - Portrait and landscape orientation
 - SuperSign® Premium

- b Ultra-Stretch Signage- 86BH5C**
 - 86" class 85.6" diagonal
 - IPS Panel Technology
 - 3840 x 600 Ultra HD Resolution
 - 58:9 Extended Wide Format
 - 4 Divided PBP in Landscape or Portrait
 - Brightness 500cd/m², Min : 400cd/m²
 - Built-in SoC and Synced Playback
 - Portrait and landscape orientation



LOOKBOOK Corporate

a Open-Frame Curved OLED Displays - 55EF5C

- 55" class
- 1920 x 1080 FHD
- Brightness 100/400cd/m² {APL100% | 25%} average picture level
- Bezel Width: 7.2mm {T,B,L,R off-bezel}
- Available in arched, curved, concave and convex by using OLED Module | Signage Box and T-Con Box | Cables
- Maximum Curvature in Portrait: 1,500R
Radius: 1,500mm
Circumference: 9,420mm
- Maximum Curvature in Landscape: 2,000R
Radius: 2,000mm
Circumference: 12,560mm

b In-Glass OLED Wallpaper - 55EG5CD

- 55" class
- 1920 x 1080 FHD
- Brightness 100/400cd/m² {APL100% | 25%}
- Available in two types of installation
- Ceiling Mount
- Floor Standing
- Hard Coating {2H}, anti-reflective treatment of the front polarizer {1.0% reflective typ}
- Portrait orientation
- SuperSign OLED | C



LOOKBOOK Corporate

a Super Narrow Bezel Video Wall - 55VH7B-H

- 55" class 54.6" diagonal
- Tile Mode up to 15 x 15 {Natural mode}
- IPS Panel Technology
- 1920 x 1080 {FHD}
- Brightness 700cd/m²
- Bezel Width 0.9mm {Top/Bottom/Left/Right}
- 24 Hours Guaranteed Operating Hour
- Portrait and landscape orientation
- SuperSign® C

b Transparent LED Film - LAT300MT1

- 30 mm (Silicone OCA) Pixel Pitch
- Brightness 1,000 cd/m²
- ≥00,000:1 Contrast Ratio
- Viewing Angle 120 x 120
- Dimensions 17.9" {w} x 11.8" {h} x 3.0" {d}
- Scalable and Flexible
- Self-Adhesive
- 256 Pixels per LED Film

c UHD 4K Monitor – Multitasking Monitor - 43MU79-B

- Designed For Multitasking
- Resolution 3840x2160
- Brightness Typical 350nits, Min 280nits
- 1000:1 (Type) Contrast Ratio
- 4 HDMI Inputs with Picture-By-Picture and Picture-In-Picture Functionality
- 4K/60hz Supported Interface and Type-C™ Connectivity



Layout 5
LOOKBOOK
Corporate

- a** Direct View Indoor LED - LAP Series
 - High brightness 1,000 | 1,200 nit
 - 6000:1 Super contrast ratio
 - Visual Viewing Angle {Horizontal} 160° {Vertical} 140°
 - LG Dynamic Contrast Algorithm
 - SuperSign Lite | SuperSign C | SuperSign
 - Simple Editor
 - webOS
 - Refresh Rate: 1920 Hz



LOOKBOOK *Corporate*

a Open-Frame Curved OLED Displays - 55EF5C

- 55" class
- 1920 x 1080 FHD
- Brightness 100|400cd/m² {APL100% | 25%} average picture level
- Bezel Width: 7.2mm {T,B,L,R off-bezel}
- Available in arched, curved, concave and convex by using OLED Module | Signage Box and T-Con Box | Cables
- Maximum Curvature in Portrait: 1,500R
Radius: 1,500mm
Circumference: 9,420mm
- Maximum Curvature in Landscape: 2,000R
Radius: 2,000mm
Circumference: 12,560mm



LOOKBOOK Corporate

a Ultra Stretch Display - 88BH7D

- 88" class
- IPS Panel Technology
- 32:9 aspect ratio
- 3840x1080 resolution
- Stand-alone
- Installation types:
 - Stand alone
 - Tri-Sided
 - Quad-Sided
 - Video wall
 - 360-degree video column
- Touch-Screen
- 4x Picture-in-Picture



LOOKBOOK Corporate

- a Super Narrow Bezel Video Wall - 55VH7B-H**
 - 55" class 54.6" diagonal
 - Tile Mode up to 15 x 15 {Natural mode}
 - IPS Panel Technology
 - 1920 x 1080 {FHD}
 - Brightness 700cd/m²
 - Bezel Width 0.9mm {Top/Bottom/Left/Right}
 - 24 Hours Guaranteed Operating Hour
 - Portrait and landscape orientation
 - SuperSign® C


- b Dual-View Curved Tiling OLED Display - 65EE5PC**
 - 55" class
 - 3840x2160 UHD
 - Brightness 450 cd/m²
 - Bezel Width: 1.5mm {T}, 26mm {B}, 13.2mm {L/R}
 - Installation types can be custom built
 - SuperSign OLED | C



Layout 9
LOOKBOOK
Corporate

- a SuperSign™ Commercial TV - 55LW540S**
- 55" Class 54.9" diagonal
 - 1920 x 1080 {FHD}
 - Brightness 300cd/m²
 - Bezel Width {L/R, U, B} : on bezel based {mm} 12.9, 12.9, 15.9
 - Bezel Width {L/R, U, B} : off bezel based {mm} 10.4, 10.4, 13.4
 - SuperSign Lite, SuperSign C, SuperSign Simple Editor
 - Triple XD Engine
 - Dynamic Color Enhancer
 - Clear Voice

- b Dual-View Flat OLED Display - 55EH5C**
- 55" class
 - 1920 x 1080 FHD
 - Brightness 100|400cd/m² {APL100% | 25%} average picture level
 - Bezel Width: 2.2mm {T,B,L,R off-bezel}
 - Available in three types of installation
 - Ceiling Mount
 - Wall Mount
 - Floor Standing
 - Portrait and landscape orientation
 - SuperSign W-Lite | C

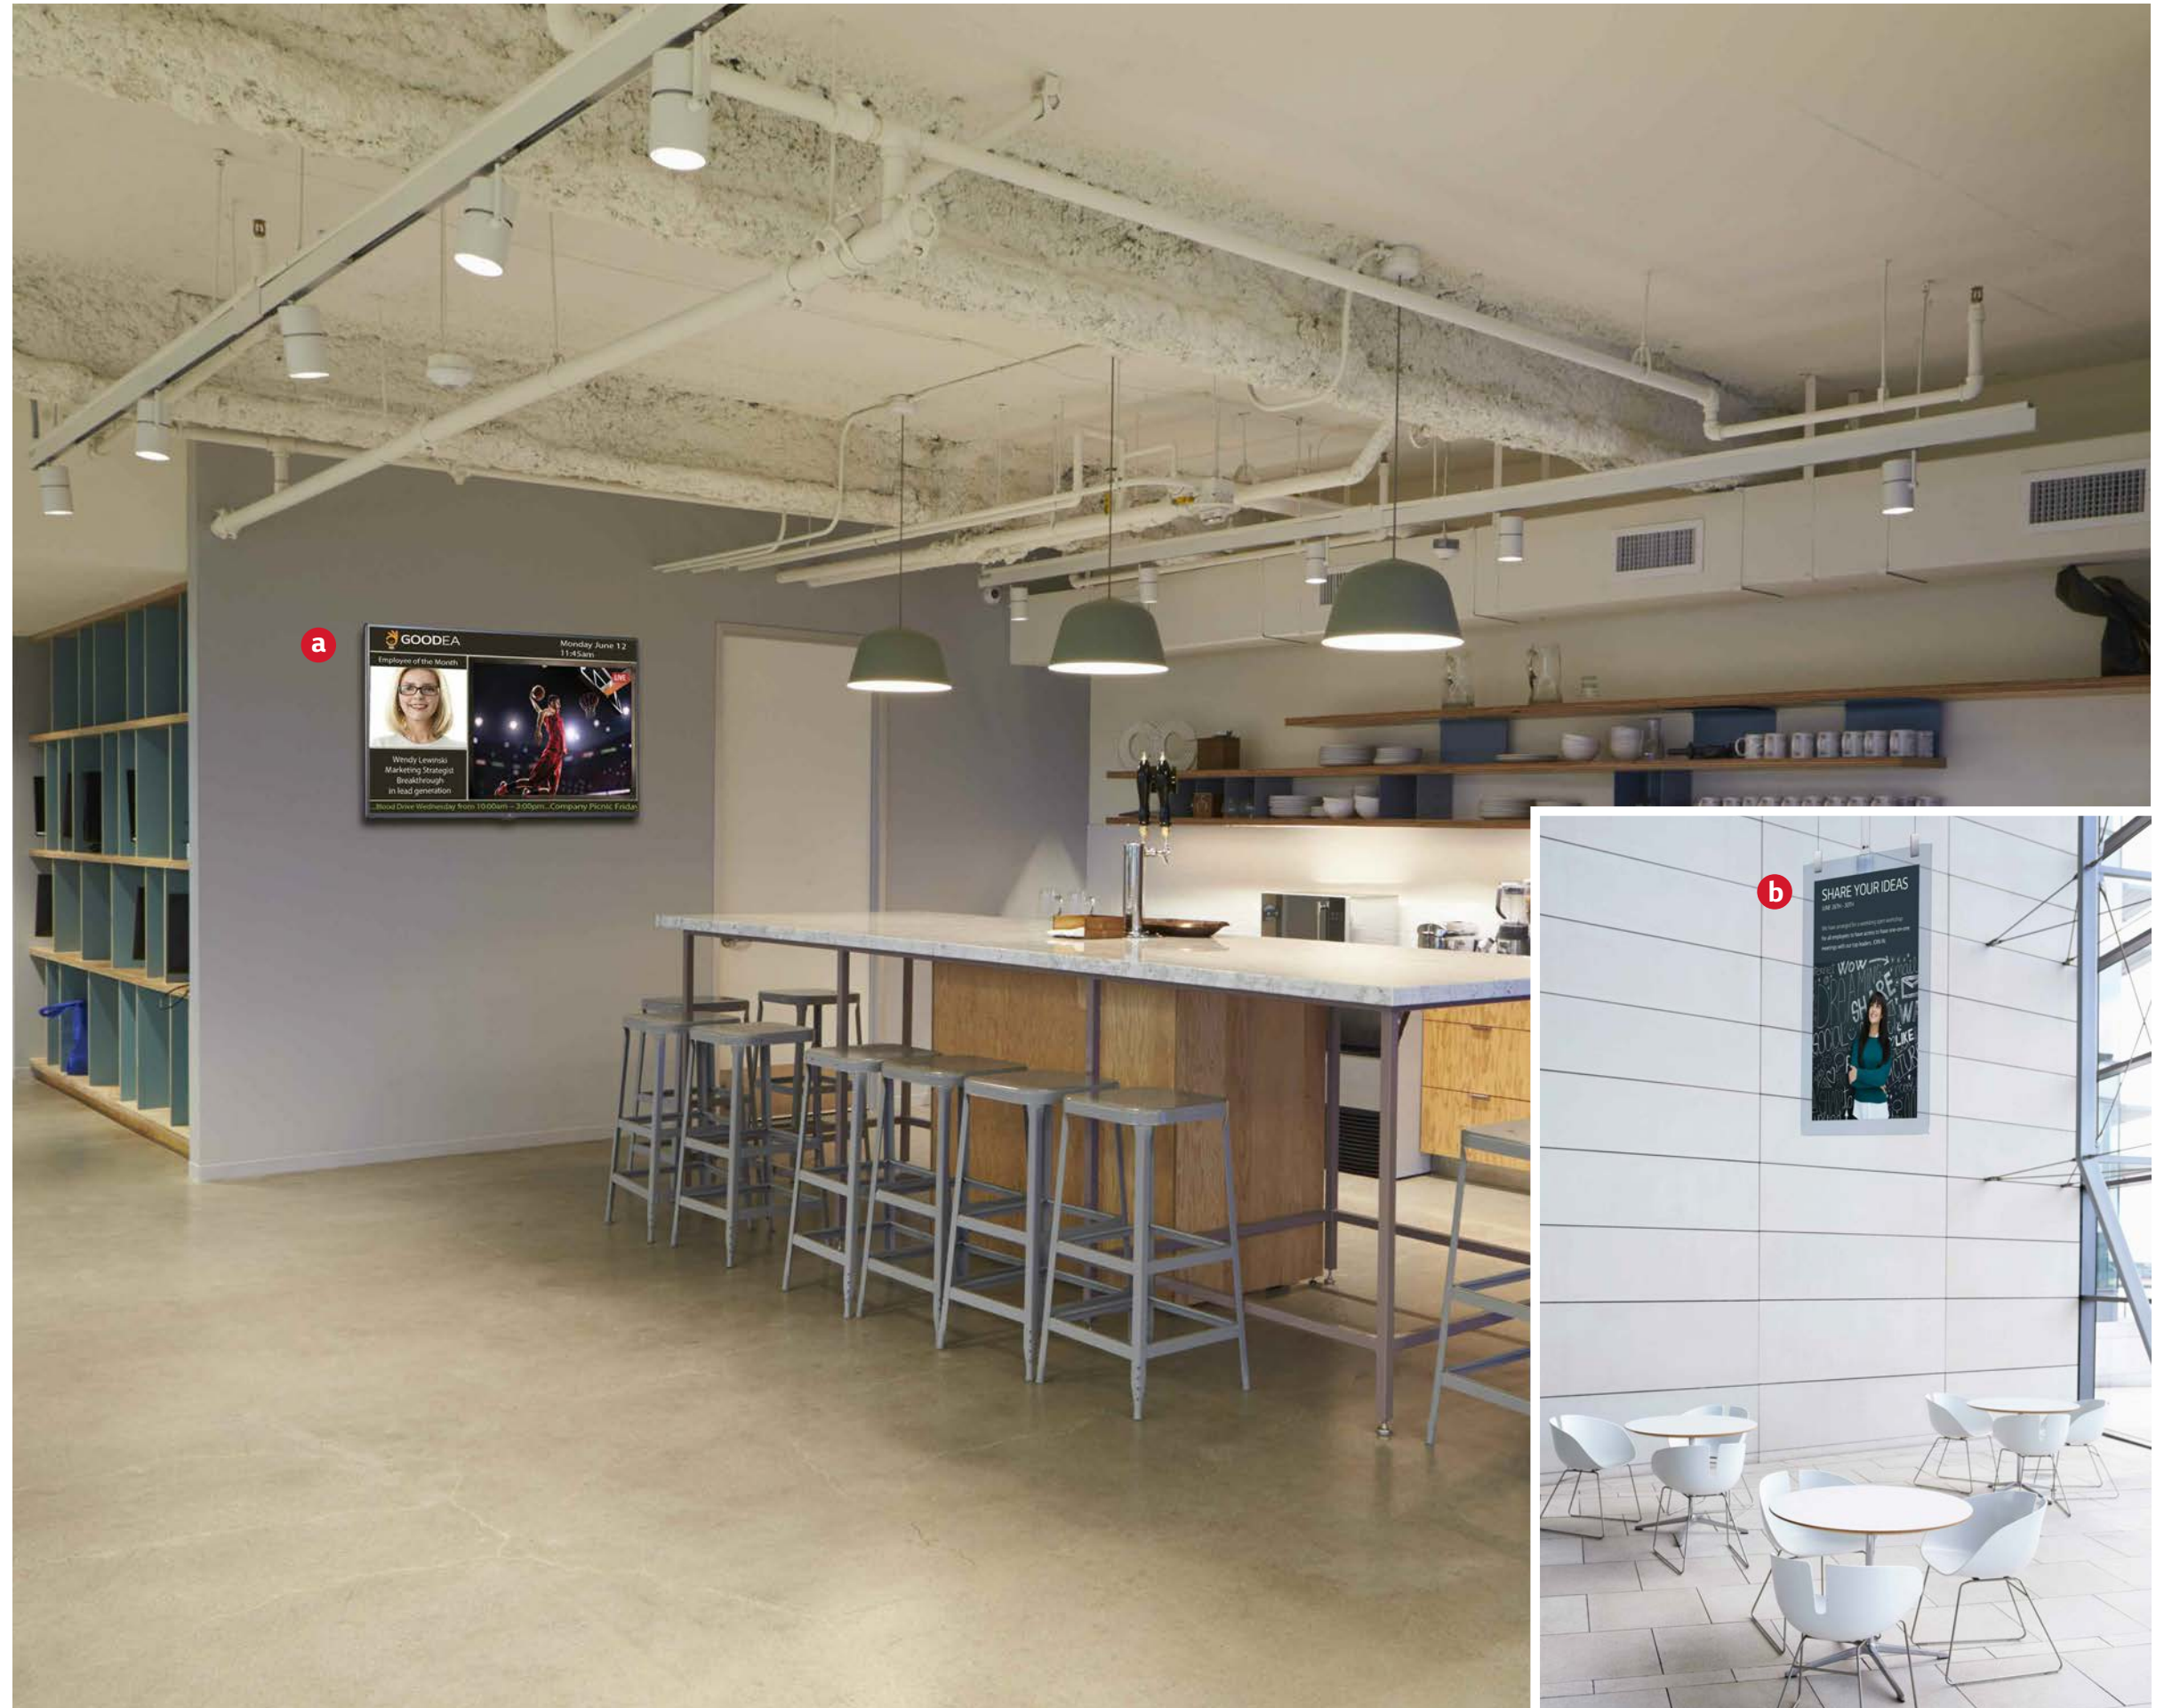


"a" Actual image from Marriott Hotel's Fitness On-Demand. "b" Images are simulated.

LOOKBOOK Corporate

- a** **Transparent LED Film - LAT300MT1**
 - 30 mm (Silicone OCA) Pixel Pitch
 - Brightness 1,000 cd/m²
 - ≥00,000:1 Contrast Ratio
 - Viewing Angle 120 x 120
 - Dimensions 17.9" {w} x 11.8" {h} x 3.0" {d}
 - Scalable and Flexible
 - Self-Adhesive
 - 256 Pixels per LED Film

- b** **Outdoor Display - 75XE3C**
 - 75" Class 74.5" measured diagonal
 - High brightness 3,000cdm² {Typ.} 2,400cd/m² {min} through front protective glass
 - 3840 x 2160 {UHD}, M+
 - 1200:1 Contrast Ratio
 - Surface Treatment Hard coating {2H}, Anti-glare treatment of the front polarizer {Haze 3% {Typ.}}
 - Operation Temperature -30 °C to 50 °C
 - Operation Humidity 5 % to 100 %
 - Direct Sunlight Yes
 - Dust | Water Proofing IP 56

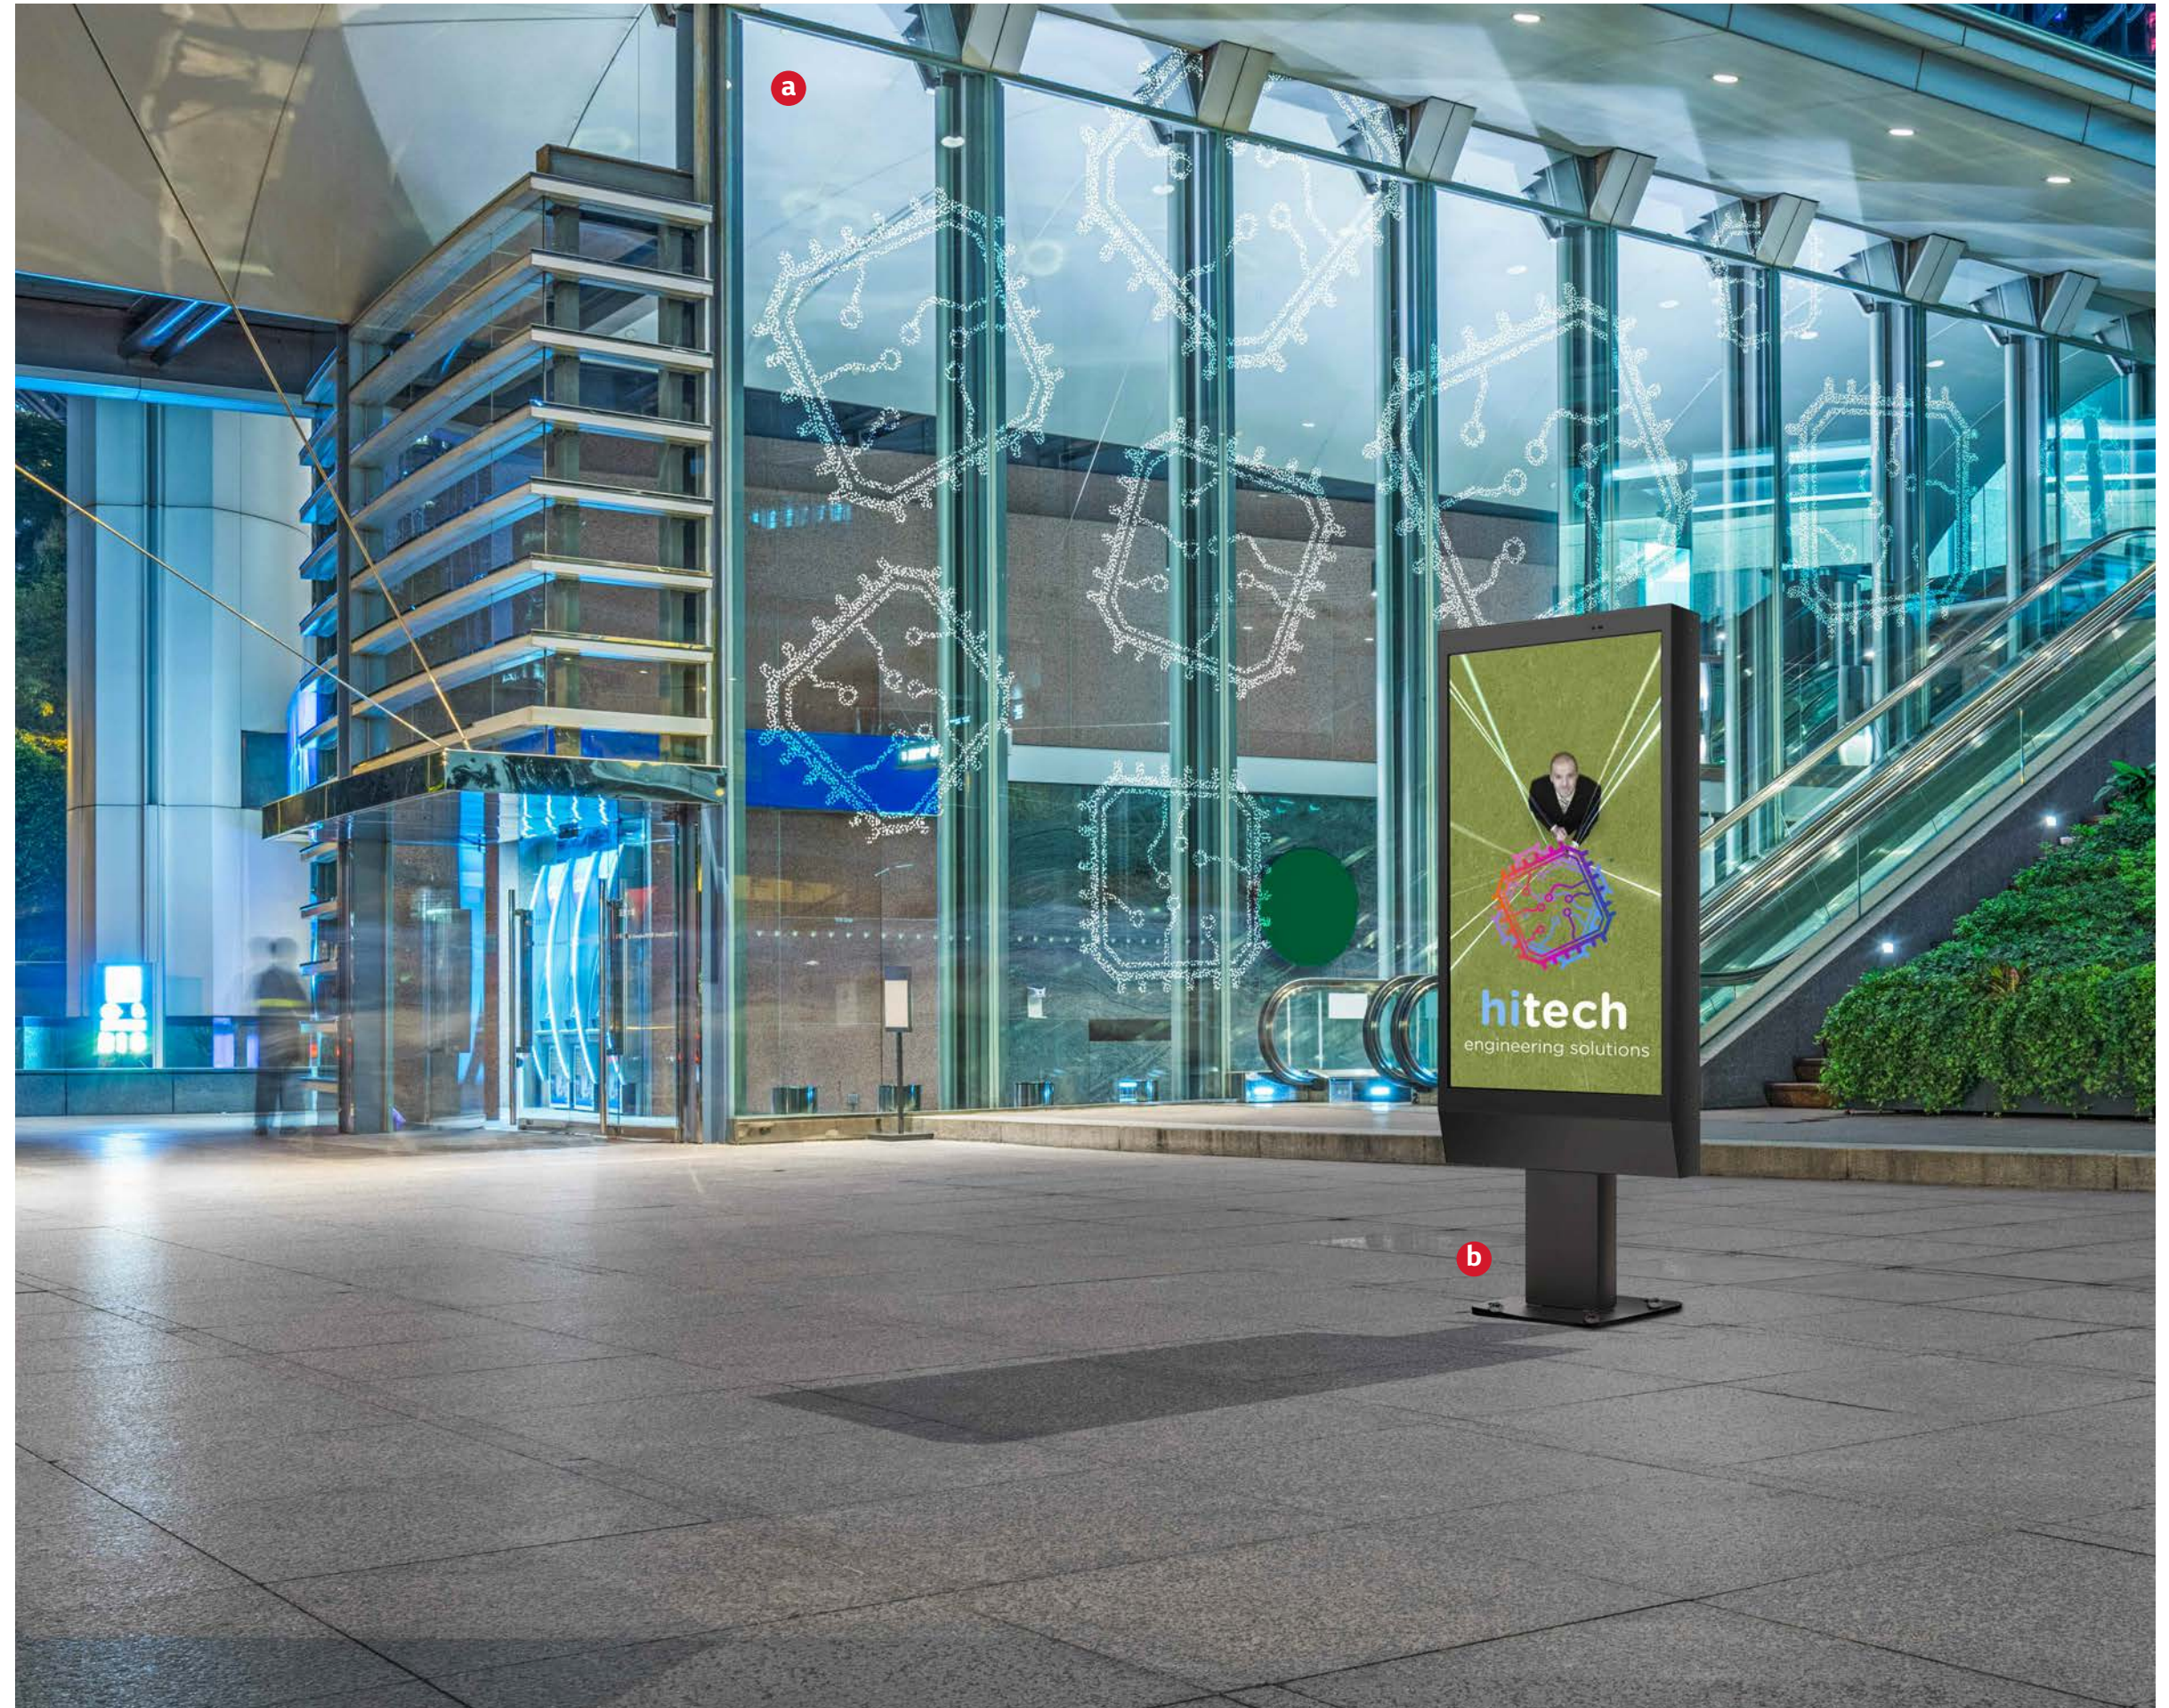

LOOKBOOK Corporate

- a** Wallpaper OLED Display - 55EJ5C
 - 55" class
 - 1920 x 1080 FHD
 - Brightness 100/400cd/m² {APL100% | 25%} average picture level
 - Bezel Width: 1.2mm {T, B, L, R offset bezel}
 - Available in two types of installation
 - Ceiling Mount
 - Wall Mount
 - Hard Coating {2H}, anti-reflective treatment of the front polarizer {1.0% reflective typ}
 - Portrait and landscape orientation
 - SuperSign OLED | C



LOOKBOOK *Corporate*

- a** Super Narrow Bezel Video Wall - 55VH7B-H
 - 55" class 54.6" diagonal
 - Tile Mode up to 15 x 15 {Natural mode}
 - IPS Panel Technology
 - 1920 x 1080 {FHD}
 - Brightness 700cd/m²
 - Bezel Width 0.9mm {Top/Bottom/Left/Right}
 - 24 Hours Guaranteed Operating Hour
 - Portrait and landscape orientation
 - SuperSign® C



LOOKBOOK Corporate

a Ultra HD Large Multi-Touch Display 86TR3D

- 86" Class
- 3840 x 2160 UHD
- IPS Panel Technology
- High Performance In-Glass™ Touch Technology
- Intuitive Touch OSD {On Screen Display}
- 20 Point Multi-Touch
- Advanced User Interface
- Auto Signal Set-up
- Built-in WiFi
- PBP {Picture by Picture}
- PIP {Picture in Picture}
- Gentle Touch {minimum radius: 3mm}





LG Electronics USA, Inc. | HE B2B Division | 2000 Millbrook Drive | Lincolnshire, IL 60069

All images on screen are simulated. Design, specifications, and features subject to change without notice.
© Copyright 2017 LG Electronics USA, Inc. All rights Reserved. LG Life's Good, ProCentric and XD Engine are registered trademarks of LG Corp. ProIdiom is a registered trademark of Zenith Electronics Corporation. All other product and brand names are trademarks or registered trademarks of their respective companies

LOOKBOOK_Corporate_051730_PR